


5530DM Hoists

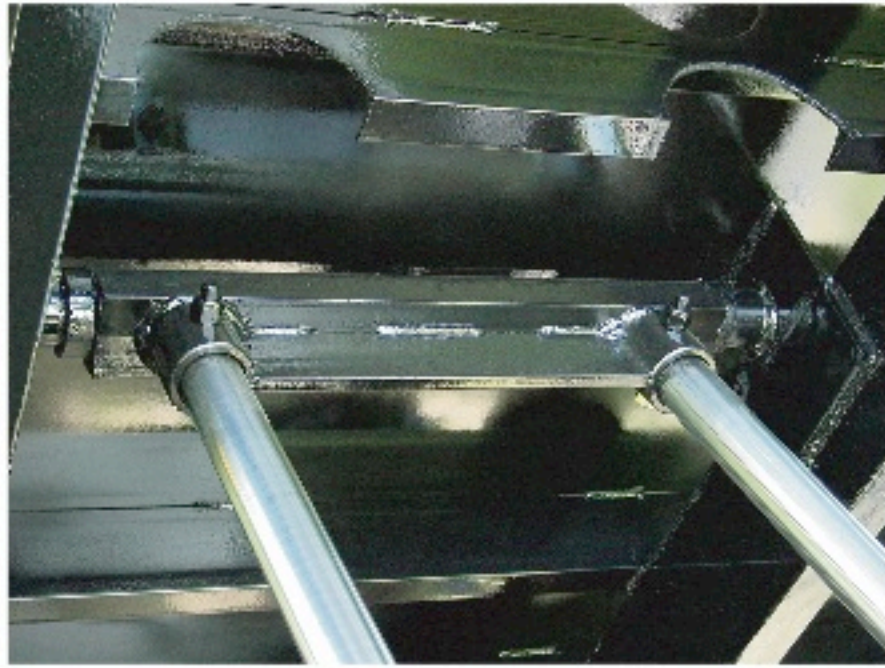

The upper lift point of the 5530DM uses 2 1/4" pins that are welded to the longitudinals for extra strength.

This Subframe is built with A572 grade 50 high tensile steel & 4140 grade weldable castings

The 5530DM is double acting.



Shown are the 4140 heavy duty steel rear hinges with full length hinge pin. These hinges weld directly to the longitudinals.

Application Specifications

The 5530DM hoist is designed for trucks with 84" to 102" CA. This hoist is perfect for 10' to 14' bodies and has a dumping angle of 42 degrees and has a 1" mounting height. For the most durable combination, 6" body longitudinals are recommended. All Champion manufactured hoist are powder coat primed and are rigorously inspected by quality control to ensure top quality. The 5530DM hoist is equipped with two 5" cylinder with a 30" stroke and 2" chrome shaft.

5530DM is equivalent to class E

Available Components



The P22 direct gear pump is bi-rotational with side and rear ports for versatility, thus eliminating the drive line for added safety and dependability. This pump has an S.A.E. "B" 2-bolt flange. 15 GPM @ 1200 RPM



The SP4 valve with cable and lever control is used in conjunction with the P22 pump. This valve is easy to install and makes the hydraulic system double acting.



The 8.5 gallon box type reservoir is designed to be frame mounted inboard. It hangs out of the way and is equipped with a brass wire mesh suction strainer, oil level & temperature gauge.

Champion Hoist and Equipment™
200 Champion Drive
Dunn, NC 28334
(910) 897-4995 Fax (910) 897-7306