

# Twin Telescopic

## 4250


- For trucks with 102" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 8.5 gallon reservoir
- Two 4" 2 stage cylinders 50" stroke
- For 14' body length
- 45 to 50 degree dump angle
- 6" minimum longitudinal recommended
- Weight 509 lbs.

### Model 42-50 Class F

## 4265

- For trucks with 120" to 126" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 8.5 gallon reservoir
- Two 4" 2 stage cylinders 65" stroke
- For 16' body length
- 45 to 50 degree dump angle
- 6" minimum longitudinal recommended
- Weight 537 lbs.

### Model 42-65 Class G

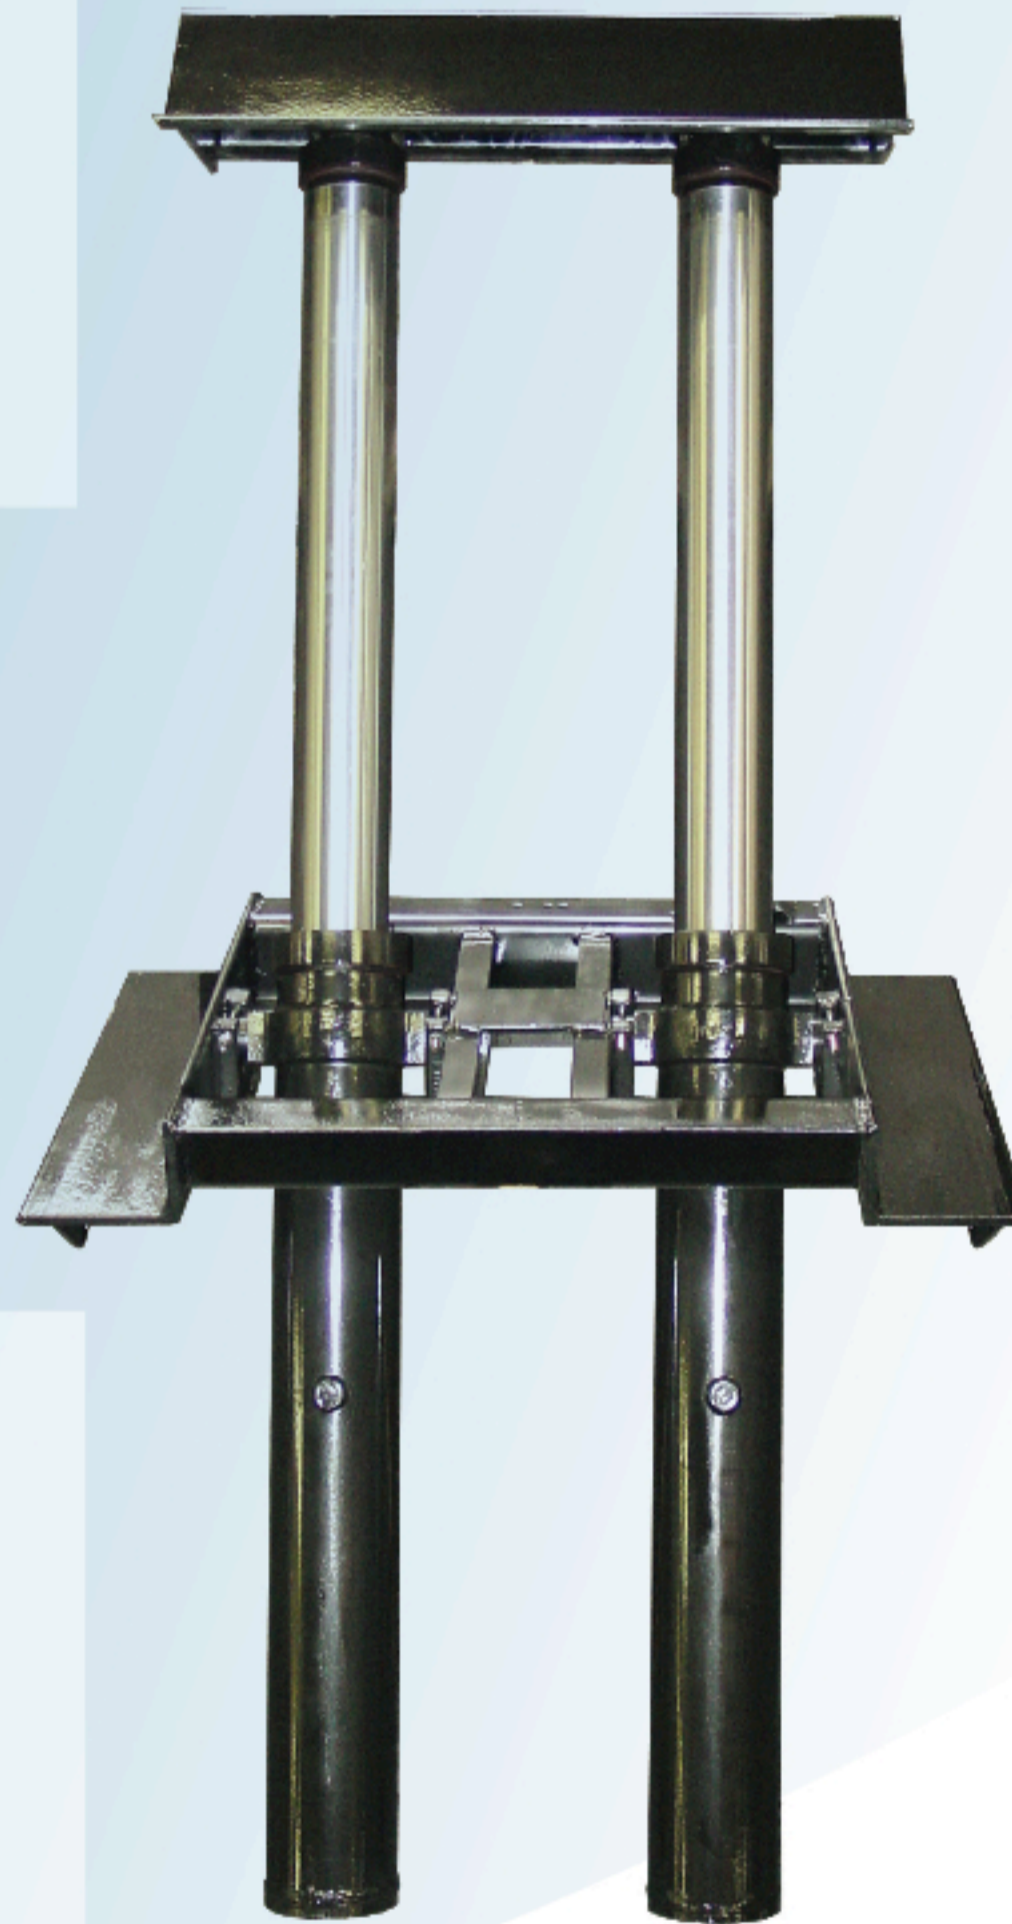

## 4398

- For trucks with 132" to 168" CA
- Designed for trucks with 25,500 to 33,000 GVWR
- Direct mount pump
- 12.5 gallon reservoir
- Two 4" 3 stage cylinders 98" stroke
- For 18' to 22' body lengths
- For single axel trucks with
- 45 to 50 degree dump angle
- 7" longitudinal recommended

### Model 43-98

## 5390

- For trucks with 126" to 168" CT
- Designed For trucks with 50,000 GVWR
- Direct mount pump
- 12.5 gallon reservoir
- Two 5" 3 stage cylinder 90" stroke
- For 18' to 24' body lengths
- 45 to 50 degree dump angle
- 7" longitudinal recommended
- Weight 788 lbs.

### Model 53-90